

TY-F18C019(F1V1) 1800MHz Filter 2in 2out

Electrical

ANT-T/R

Frequency range, MHz.....	1735-1780&1830-1875
Insertion loss, dB.....	0.3 max@1735-1780MHz 0.8max@1830-1875MHz(average in 5MHz 20 points)
Return loss, dB.....	18
Rejection, dB (1880-1980MHz).....	45
Power Handling, W.....	50

Mechanical

Height, depth, width, mm.....	250x90x155
Weight with mounting brackets, kg.....	5
Finish.....	灰色 paint
Connector, RF.....	7/16- female & N-female
Ground Screw.....	M8
Mounting Kit.....	Pole/ 墙 Bracket


Environmental

Operating temperature range, °C.....	-40 至 +55
Relative humidity, %.....	15-93
Ingress protection.....	IP65

Part No.

TY- F18C019(F1V1)..... 直流 PASS

Block Diagram

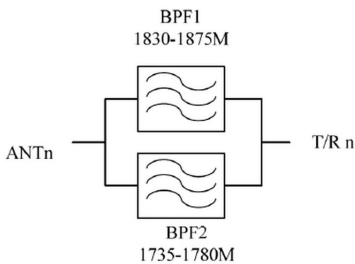

Frequency Response

