

XXXXXPoI 698~960MHz×2/1710~2690MHz×2/1710~2690MHz 65°/65°/65°
 16.6/17.4/17.6dBi 2°~10°/2°~12°/2°~12° Integrated and replaceable RCU (Remote Control Unit) Antenna

Electrical specifications

Frequency Range (MHz)	R1/R2 -698~960			
	698~803	790~862	824~894	880~960
Polarization	±45°			
Gain at mid tilt (dBi)	16.0	16.2	16.4	16.7
Gain over all tilts (dBi)	15.8±0.9	16.0±0.4	16.2±0.4	16.5±0.2
Horizontal 3dB beamwidth (°)	68±6.0	67±5.4	68±5.0	68±3.0
Vertical 3dB beamwidth (°)	8.6±0.8	8.0±0.5	7.9±0.7	7.4±0.5
Front to back ratio (dB) Total power, ±30°	>22	>25	>25	>25
Cross polar ratio (dB) (at Boresight)	>19	>19	>19	>20
Electrical downtilt (°)	2~10			
Sidelobe suppression (dB) (First sidelobe above main beam)	>15	>15	>16	>16
VSWR	<1.5			
Isolation: intra-system (dB)	≥25			
Isolation: inter-system (dB)	≥25 (R1//R2) ≥28 (Other)			
Intermodulation IM3 (2×43dBm carrier)	≤-153 dBc			
Impedance (Ω)	50			
Max. power per input (W) @50°C	400			
Lightning protection	Dc Ground			

Electrical specifications

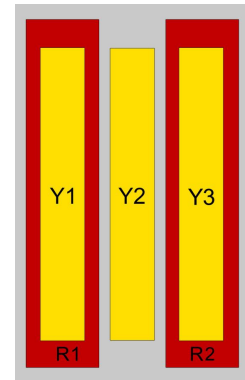
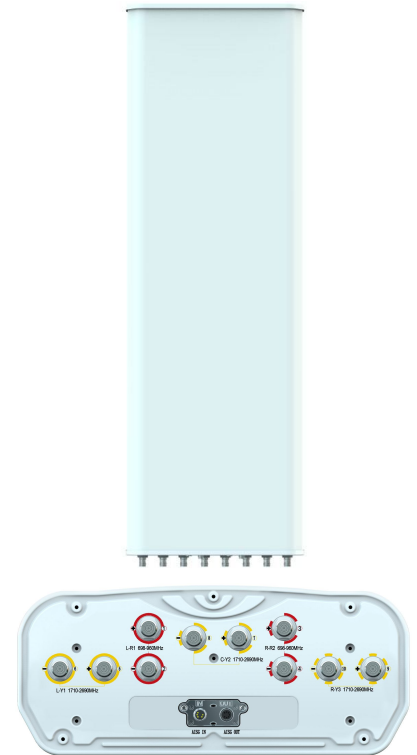
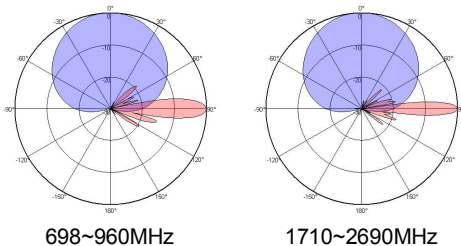
Frequency Range (MHz)	Y1/Y3-1710~2690				Y2-1710~2690			
	1710~1990	1920~2200	2200~2490	2490~2690	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°							
Gain at mid tilt (dBi)	17.1	17.3	17.4	17.5	17.2	17.4	17.5	17.7
Gain over all tilts (dBi)	17.0±0.5	17.1±0.7	17.2±0.8	17.4±0.8	17.1±0.6	17.3±0.5	17.4±0.4	17.6±0.6
Horizontal 3dB beamwidth (°)	67±7	64±5	60±6	59±6	63±6	59±5	63±5	62±4
Vertical 3dB beamwidth (°)	6.9±0.5	6.1±0.5	5.4±0.4	4.9±0.4	7.0±0.6	6.4±0.6	5.6±0.5	5.0±0.5
Front to back ratio (dB) Total power, ±30°	>25	>25	>25	>25	>28	>28	>28	>28
Cross polar ratio (dB) (at Boresight)	>20	>18	>17	>16	>19	>18	>17	>17
Electrical downtilt (°)	2~12							
Sidelobe suppression (dB) (First sidelobe above main beam)	>16	>16	>16	>16	>16	>16	>16	>16
VSWR	<1.5							
Isolation: intra-system (dB)	≥25							
Isolation: inter-system (dB)	≥28							
Intermodulation IM3 (2×43dBm carrier)	≤-153 dBc							
Impedance (Ω)	50							
Max. power per input (W) @50°C	200							
Lightning protection	Dc Ground							

Mechanical specifications

Connector	10×4.3-10 Female
Connector position	Bottom
Height × width × depth (mm)	2680×469×198
Packing size (mm)	3120×585×350
Antenna weight (kg)	45.1
Installation kit weight (kg)	8.8
Packing weight (kg)	62.5
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	1163/352/1207
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0-8
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

Integrated RET properties

RET model	TRCU-TQ10P2V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle, 12V), ≤6 (In motion, 12V)
Adjustment time (Full Range)	< 4Mins
Adjustment cycles	> 50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in:Male,Daisy chain out:Female Pin1:12V;Pin3:RS485B;Pin5:RS485A;Pin6:10-30V; Pin7:GND;Pin2&Pin4&Pin8:N/C

Antenna pattern sample for reference


View from the front of the antenna

Ant Array	RET Unique ID
R1	TY00000.....R1
R2	TY00000.....R2
Y1	TY00000.....Y1
Y2	TY00000.....Y2
Y3	TY00000.....Y3