

**XXPol 790~960MHz/1710~2170MHz 65°/65° 17/17.5dBi 0°~10°/0°~8° Integrated RCU
(Remote Control Unit) Antenna**
Electrical specifications

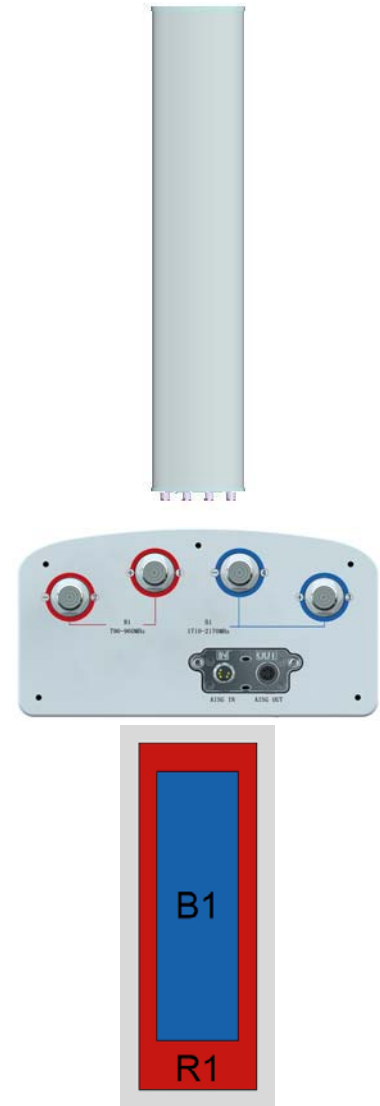
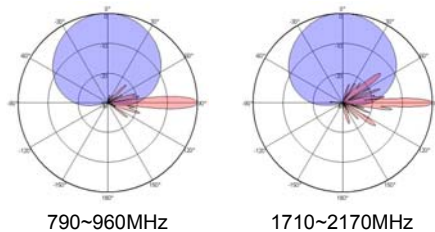
Frequency Range (MHz)	790~960			1710~2170		
	790~862	824~896	880~960	1710~1880	1850~1990	1920~2170
Polarization	±45°					
Gain at mid tilt (dBi)	16.5	17.0	17.1	17.2	17.4	17.6
Gain over all tilts (dBi)	16.4±0.7	16.8±0.6	17±0.4	17±0.3	17.2±0.3	17.4±0.3
Horizontal 3dB beamwidth (°)	66±3	64±3	62±2	67±3	64±3	61±3
Vertical 3dB beamwidth (°)	9±0.9	8.6±0.8	8.1±0.7	6.3±0.3	6±0.3	5.5±0.5
Front to back ratio (dB) Total power, ±30°	>25	>25	>25	>25	>25	>25
Cross polar ratio (dB) (at Boresight)	>19	>19	>18	>18	>18	>17
Electrical downtilt (°)	0-10			0-8		
Sidelobe suppression (dB) (First sidelobe above main beam)	>17	>17	>17	>16	>16	>16
VSWR	≤1.5					
Isolation: intra-system (dB)	≥28					
Isolation: inter-system (dB)	≥30					
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc					
Impedance (Ω)	50					
Max. power per input (W) @50°C	400			250		
Lightning protection	Dc Ground					

Mechanical specifications

Connector	4×4.3-10-Female
Connector position	Bottom
Height × width × depth (mm)	2580×270×140
Packing size (mm)	2905×365×220
Antenna weight (kg)	25
Installation kit weight (kg)	5.5
Packing weight (kg)	34
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~8
Operating temperature (°C)	-40~65
Mounting hardware (mm)	Φ50~Φ115

Integrated RET properties

RET model	TRCU-TQ10P2V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle,12V),≤6 (In motion,12V)
Adjustment time (Full Range)	<4Mins
Adjustment cycles	>50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in:Male,Daisy chain out:Female Pin1:12V;Pin3:RS485B;Pin5:RS485A;Pin6:10-30V; Pin7:GND;Pin2&Pin4&Pin8:N/C

Antenna pattern sample for reference


Ant Array	RET Unique ID
R1	TY00000.....R1
B1	TY00000.....B1