

XXXXPoI 694~960MHz×2/1427~2690MHz×2 65°/65° 17/18.0dBi 2°~12°/2°~12° Integrated and replaceable RCU (Remote Control Unit) Antenna

**Electrical specifications**

Frequency Range (MHz)	R1/R2-694~960×2			
	694~806	790~862	824~894	880~960
Polarization	±45°			
Gain at mid tilt (dBi)	15.9	16.3	16.7	17
Gain over all tilts (dBi)	15.7±0.5	16.1±0.5	16.5±0.5	16.8±0.5
Horizontal 3dB beamwidth (°)	68±5	67±3	66±4	65±3
Vertical 3dB beamwidth (°)	8.8±0.7	8.1±0.5	7.9±0.4	7.6±0.4
Front to back ratio (dB) Total power, ±30°	>20	>22	>25	>27
Cross polar ratio (dB) (at Boresight)	>15	>15	>15	>18
Electrical downtilt (°)	2~12			
Sidelobe suppression (dB) (First sidelobe above main beam)	>16	>16	>16	>16
VSWR	<1.5			
Isolation: intra-system (dB)	≥25			
Isolation: inter-system (dB)	R1//R2 ≥25 R1,R2//Y1,Y2 ≥25			
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc			
Impedance (Ω)	50			
Max. power per input (W) @50°C	400			
Lightning protection	Dc Ground			

**Electrical specifications**

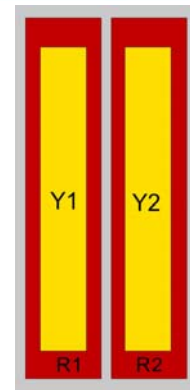
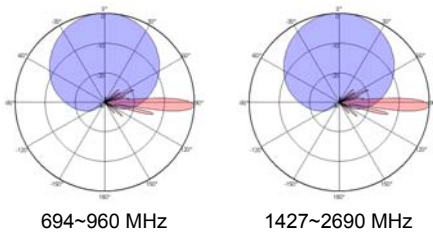
Frequency Range (MHz)	Y1/Y2-1427~2690×2				
	1427~1518	1710~1920	1920~2200	2200~2490	2490~2690
Polarization	±45°				
Gain at mid tilt (dBi)	16.2	17.2	17.6	17.9	18.1
Gain over all tilts (dBi)	16.1±0.5	17.1±0.5	17.5±0.5	17.8±0.5	18±0.6
Horizontal 3dB beamwidth (°)	69±5	67±6	65±5	65±5	60±6
Vertical 3dB beamwidth (°)	8.1±0.6	6.8±0.6	5.8±0.5	5.3±0.5	4.9±0.5
Front to back ratio (dB) Total power, ±30°	>24	>26	>25	>25	>25
Cross polar ratio (dB) (at Boresight)	>18	>19	>22	>21	>21
Electrical downtilt (°)	2~12				
Sidelobe suppression (dB) (First sidelobe above main beam)	>15	>17	>16	>17	>15
VSWR	<1.5				
Isolation: intra-system (dB)	≥25				
Isolation: inter-system (dB)	Y1,Y2//R1,R2 ≥28				
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc				
Impedance (Ω)	50				
Max. power per input (W) @50°C	200				
Lightning protection	Dc Ground				

**Mechanical specifications**

Connector	8×4.3-10 Female
Connector position	Bottom
Height × width × depth (mm)	2680×379×177
Packing size (mm)	3120×485×275
Antenna weight (kg)	42
Installation kit weight (kg)	5.4
Packing weight (kg)	56.2
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	864/225/965
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~8
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

**Integrated RET properties**

RET model	TRCU-TQ10P2V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle,12V),≤6 (In motion,12V)
Adjustment time (Full Range)	<4Mins
Adjustment cycles	>50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in:Male,Daisy chain out:Female Pin1:12V;Pin3:RS485B;Pin5:RS485A;Pin6:10-30V; Pin7:GND;Pin2&Pin4&Pin8:N/C


**Antenna pattern sample for reference**


Ant Array	RET Unique ID
R1	TY00000.....R1
R2	TY00000.....R2
Y1	TY00000.....Y1
Y2	TY00000.....Y2