

XXXXPoI 698~862MHz/880~960MHz/1710~2690MHz/1427~2690MHz 65°/65°/65°/65°  
14.5/15/18/18dBi 2°~12°/2°~12°/2°~12°/2°~12° Integrated and replaceable RCU (Remote Control Unit) Antenna,with Combiner Integrated

Electrical specifications							
Frequency Range (MHz)	R1-698~862		R2-880~960	Y1-1710~2690			
	694~803	790~862	880~960	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°						
Gain at mid tilt (dBi)	14.0	14.4	14.9	17.1	17.5	17.8	18
Gain over all tilts (dBi)	13.8±0.4	14.2±0.4	14.7±0.5	16.9±0.6	17.3±0.5	17.6±0.5	17.8±0.5
Horizontal 3dB beamwidth (°)	70±4	67±3	64±3	67±5	60±5	60±6	66±5
Vertical 3dB beamwidth (°)	16.1±1.4	14.7±0.8	12.9±0.8	7.3±0.5	6.4±0.5	5.5±0.4	5±0.4
Front to back ratio (dB) Total power, ±30°	>24	>24	>25	>26	>25	>25	>25
Cross polar ratio (dB) (at Boresight)	>19	>19	>18	>18	>19	>19	>19
Electrical downtilt (°)	2~14		2~14	2~12			
Sidelobe suppression (dB) (First sidelobe above main beam)	>16	>17	>17	>17	>17	>16	>16
VSWR	<1.5						
Isolation: intra-system (dB)	≥25		≥25	≥25			
Isolation: inter-system (dB)	≥30		≥30	≥28			
Intermodulation IM3 (2×43dBm carrier)	≤-153 dBc						
Impedance (Ω)	50						
Max. power per input (W) @50°C	400		400	200			
Lightning protection	Dc Ground						

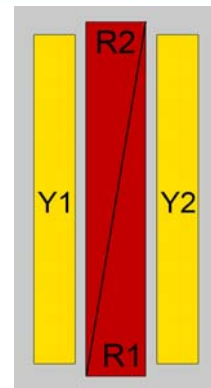
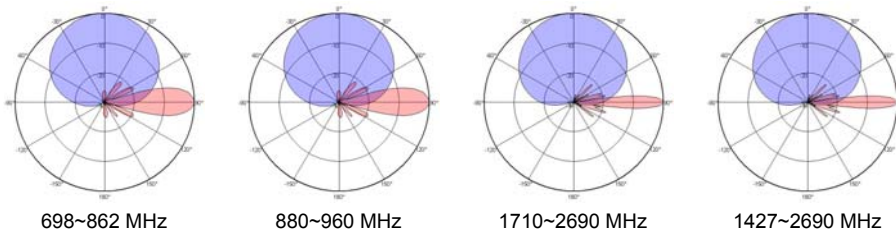
Electrical specifications					
Frequency Range (MHz)	Y2 -1427-2690				
	1427~1518	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°				
Gain at mid tilt (dBi)	15.6	17.0	17.6	18.0	17.8
Gain over all tilts (dBi)	15.4±0.5	16.8±0.5	17.4±0.5	17.8±0.5	17.6±0.5
Horizontal 3dB beamwidth (°)	69±6	65±5	62±4	57±5	59±5
Vertical 3dB beamwidth (°)	8.8±0.7	7.3±0.6	6.2±0.5	5.7±0.5	5.1±0.5
Front to back ratio (dB) Total power, ±30°	>24	>26	>26	>26	>25
Cross polar ratio (dB) (at Boresight)	>17	>17	>17	>16	>16
Electrical downtilt (°)	2~12				
Sidelobe suppression (dB) (First sidelobe above main beam)	>17	>17	>16	>16	>16
VSWR	<1.5				
Isolation: intra-system (dB)	≥25				
Isolation: inter-system (dB)	≥28				
Intermodulation IM3 (2×43dBm carrier)	≤-153 dBc				
Impedance (Ω)	50				
Max. power per input (W) @50°C	200				
Lightning protection	Dc Ground				

**Mechanical specifications**

Connector	8×4.3-10 Female
Connector position	Bottom
Height × width × depth (mm)	1499×355×165
Packing size (mm)	1835×460×260
Antenna weight (kg)	21
Installation kit weight (kg)	5.4
Packing weight (kg)	30
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	598/187/669
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~15
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

**Integrated RET properties**

RET model	TRCU-TQ10P2V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle, 12V), ≤6 (In motion, 12V)
Adjustment time (Full Range)	< 4Mins
Adjustment cycles	> 50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in: Male, Daisy chain out: Female Pin1: 12V; Pin3: RS485B; Pin5: RS485A; Pin6: 10-30V; Pin7: GND; Pin2&Pin4&Pin8: N/C

**Antenna pattern sample for reference**


Ant Array	RET Unique ID
R1	TY00000.....R1
R2	TY00000.....R2
Y1	TY00000.....Y1
Y2	TY00000.....Y2