


XXXXPol 1695~2690MHz×2/3300~4200MHz×2 65°/65° 12.5/12.5dBi 0°/0° Fixed Electrical Downtilt Antenna
Electrical Specifications

Frequency range(MHz)	1695~2690				3300~4200	
	1695~1920	1920~2200	2200~2500	2500~2690	3300~3800	3800~4200
Polarization	±45°				±45°	
Gain (dBi)	11.0±0.5	11.5±0.5	12.0±0.5	12.5±0.5	12.0±0.5	12.5±0.5
Horizontal 3dB beamwidth (°)	67±5	65±5	63±5	60±5	66±4	63±4
Vertical 3dB beamwidth (°)	38±3	36±3	32±3	30±3	25±3	20±3
Front-to-back ratio (dB)	>24	>25	>24	>25	>24	>25
Cross-polar ratio (dB)	>15(0°)	>15(0°)	>15(0°)	>15(0°)	>15(0°)	>15(0°)
Electrical downtilt (°)	0				0	
VSWR	≤1.5				≤1.5	
Isolation: intra-system (dB)	≥25				≥25	
Intermodulation IM3 (2×43dBm carrier)	≤150dBc				≤-150 dBc	-
Impedance (Ω)	50				50	
Max. power per input (W) @50°C	200				150	
Lightning protection	Dc Ground					

Mechanical Specifications

Connector	8×4.3-10 Female
Connector position	Bottom
Height×width×depth (mm)	335×320×80
Packing size (mm)	565×405×170
Antenna weight (kg)	3.6
Installation kit weight (kg)	1.9
Packing weight (kg)	6.9
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	115/19/129
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~15
Operating temperature (°C)	-40~60
Mounting hardware (mm)	Φ50~Φ115

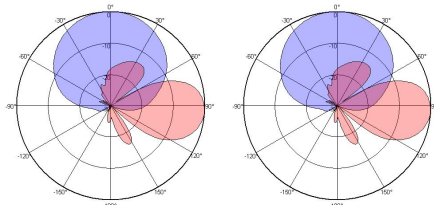

1695~2690MHz

3300~4200MHz

