


4.3-10 Female to N Female adapter.
Electrical specifications

Frequency Range	DC to 3 GHz
Impedance	50Ω
Return loss	Max. 1.12 (0-3GHz)
Insertion loss	0.05+0.05*SQRT(f) dB
Intermodulation IM3(2x43dBm)	≤-155 dBc
Dielectric with standing voltage	1500V, AC,1Min
Insulation resistance	≥5000MΩ
Center contact resistance	≤1.5mΩ
Outer contact resistance	≤1.0mΩ

Mechanical specifications

Connector specification	IEC 61169-16, IEC 61169-54
Connector type 1	4.3-10 Female
Connector type 2	N Female
Durability	500 Cycles MIN.
Operating temperature	-40 °C to +85 °C
Body material	Brass, alloy plating
Salt mist	48H

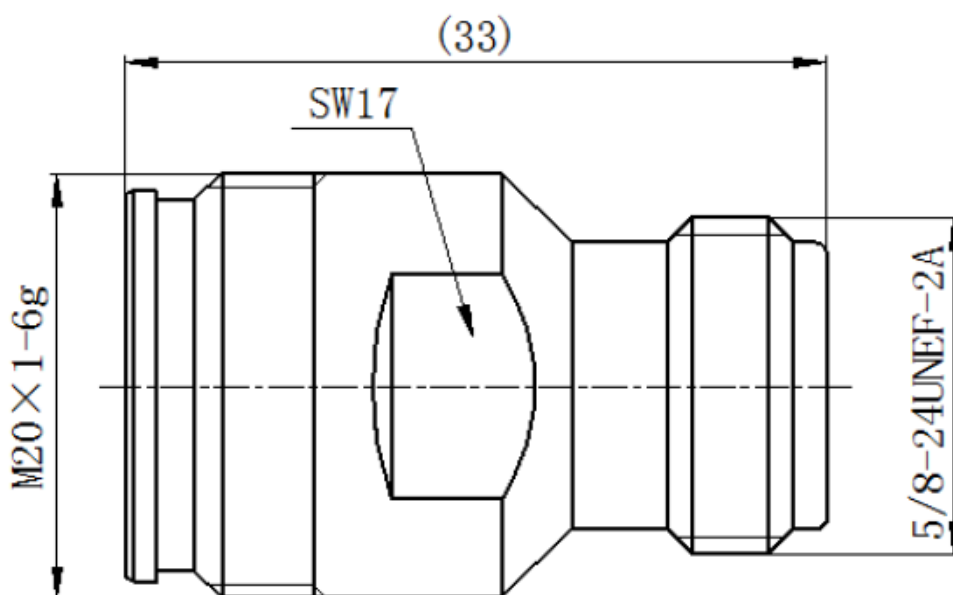

All dimensions are in mm