


4.3-10 Male to 4.3-10 Female adapter.
Electrical specifications

Frequency Range	DC to 3 GHz
Impedance	50Ω
Return loss	Max. 1.12 (0-3GHz)
Insertion loss	0.05+0.05*SQRT(f) dB
Intermodulation IM3(2x43dBm)	≤-160 dBc
Dielectric with standing voltage	1500V, AC,1Min
Insulation resistance	≥5000MΩ
Center contact resistance	≤1.0mΩ(4310)
Outer contact resistance	≤1.0mΩ(4310)

Mechanical specifications

Connector specification	IEC 61169-54
Connector type 1	4.3-10 Male
Connector type 2	4.3-10 Female
Durability	100 Cycles MIN.
Operating temperature	-40 °C to +85 °C
Body material	Brass, alloy plating
Salt mist	48H

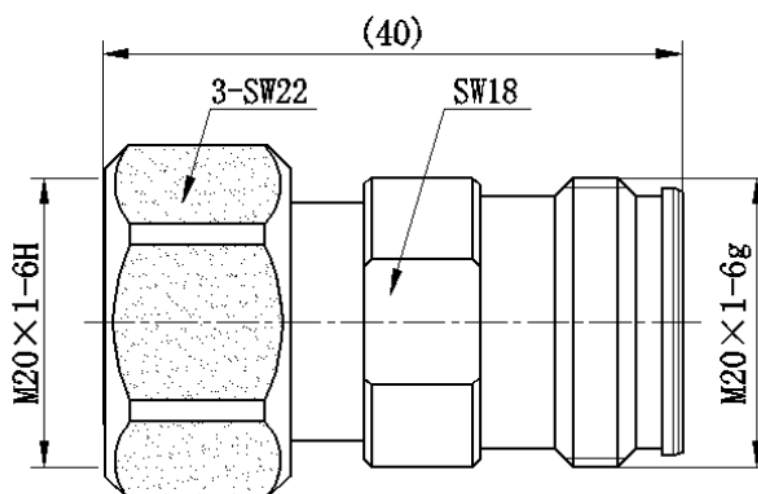

All dimensions are in mm