

XXPol 698~960MHz/1710~2690MHz 65°/65° 17.1/18.2dBi 0°~10°/0°~10° Integrated and replaceable RCU (Remote Control Unit) Antenna,with Combiner Integrated

Electrical Specifications				
Frequency range (MHz)	698~960			
	698~803	790~862	824~894	880~960
Polarization	±45°			
Gain at mid tilt (dBi)	16.4	16.6	16.7	17.1
Gain over all tilts (dBi)	16.3±0.5	16.5±0.4	16.6±0.4	16.9±0.5
Horizontal 3dB beamwidth (°)	68±5	67±5	67±5	66±5
Vertical 3dB beamwidth (°)	9.2±0.6	8.4±0.5	8.0±0.4	7.5±0.4
Front to back ratio (dB) Total power, ±30°	>24	>25	>26	>26
Cross polar ratio (dB) (at Boresight)	>22	>22	>23	>23
Electrical downtilt (°)	0~10			
Sidelobe suppression (dB) (First sidelobe above main beam)	>17	>17	>17	>17
VSWR	<1.5			
Isolation: intra-system (dB)	≥25			
Isolation: inter-system (dB)	≥28			
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc			
Impedance (Ω)	50			
Max. power per input (W) @50°C	400			
Lightning protection	DC Ground			

Electrical Specifications				
Frequency Range (MHz)	1710~2690			
	1710~1920	1920~2200	2200~2490	2490~2690
Gain at mid tilt (dBi)	17.2	17.6	17.8	18.2
Gain over all tilts (dBi)	17.0±0.5	17.4±0.5	17.6±0.5	18.0±0.5
Horizontal 3dB beamwidth (°)	65±5	62±5	60±5	60±5
Vertical 3dB beamwidth (°)	6.8±0.5	6.0±0.4	5.2±0.4	4.8±0.4
Front to back ratio (dB) Total power, ±30°	>25	>26	>26	>25
Cross polar ratio (dB) (at Boresight)	>18	>18	>16	>16
Electrical downtilt (°)	0~10			
Sidelobe suppression (dB) (First sidelobe above main beam)	>17	>17	>16	>16
VSWR	<1.5			
Isolation: intra-system (dB)	>25			
Isolation: inter-system (dB)	>28			
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc			
Impedance (Ω)	50			
Max. power per input (W) @50°C	250			
Lightning protection	DC Ground			




Mechanical Specifications

Connector	2×7/16DIN Female
Connector position	Bottom
Height × width × depth (mm)	2580×300×146
Packing size (mm)	2870×365×200
Antenna weight (kg)	21.8
Installation kit weight (kg)	5.4
Packing weight (kg)	33.8
Wind load (N,at 150km/h) Frontal/Lateral/Maximum	949/326/1127
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~10
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

Integrated RET Properties

RET model	TRCU-TQ10P2V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle, 12V), ≤6 (In motion, 12V)
Adjustment time (Full Range)	< 4Mins
Adjustment cycles	> 50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in:Male,Daisy chain out:Female Pin1:12V;Pin3:RS485B;Pin5:RS485A;Pin6:10-30V; Pin7:GND;Pin2&Pin4&Pin8:N/C

Antenna Pattern Sample For Reference

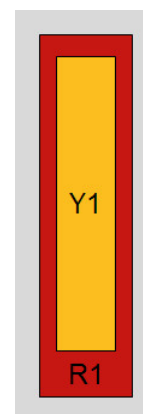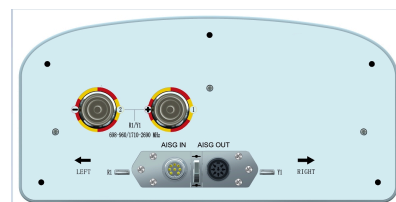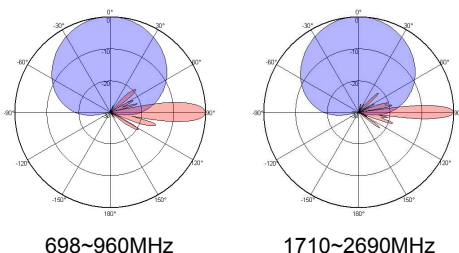

Ant Array	RET Unique ID
R1	TY00000.....R1
Y1	TY00000.....Y1