



Product Name

Power Splitter (Reactive Model, 698-3800MHz, 300W, IP65,)


Product Features

- ◆ Wide Frequency Band
- ◆ Tetra/2G/3G/4G/LTE/5G Coverage
- ◆ Low Passive Intermodulation
- ◆ Low VSWR & Insertion Loss
- ◆ Indoor & Outdoor Application IP65
- ◆ Widely used for In-building Solutions

Technical & Mechanical Specifications

Model No.	TY-CPS0738-02-N1	TY-CPS0738-03-N1	TY-CPS0738-04-N1
Freq(MHz)	698-3800		
Split Loss(dB)	3.0	4.8	6.0
Insertion Loss(dB)	≤0.3	≤0.5	≤0.6
VSWR	≤1.3		
PIM(dBc)	≤-150dBc@2*43dBm		
Total Input Power(W)	300		
Impedance	50 ohm		
Connector	N-female		
Color	Black		
Temp(deg)	-30~+70		
Application	Indoor or Outdoor, IP65		
Weight(kg)	0.4	0.5	0.55

Mechanical Drawing

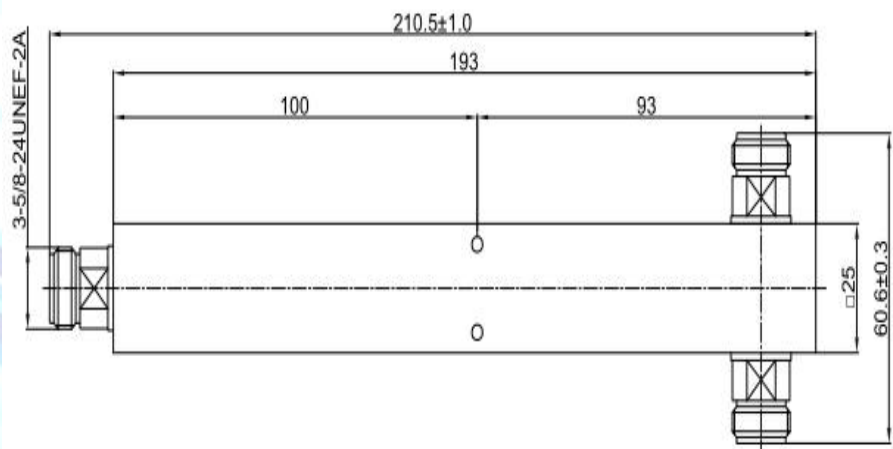


Tongyu Communication Inc.

No. 1, Dongzhendong 2nd RD, Torch Hi-Tech Development Zone, Zhongshan, Guangdong, China
Tel:+86 (0)760 85318111 Fax:+86 (0)760 85594662 Website:www.tycc.cn email:sales@tycc.cn



Power Splitter

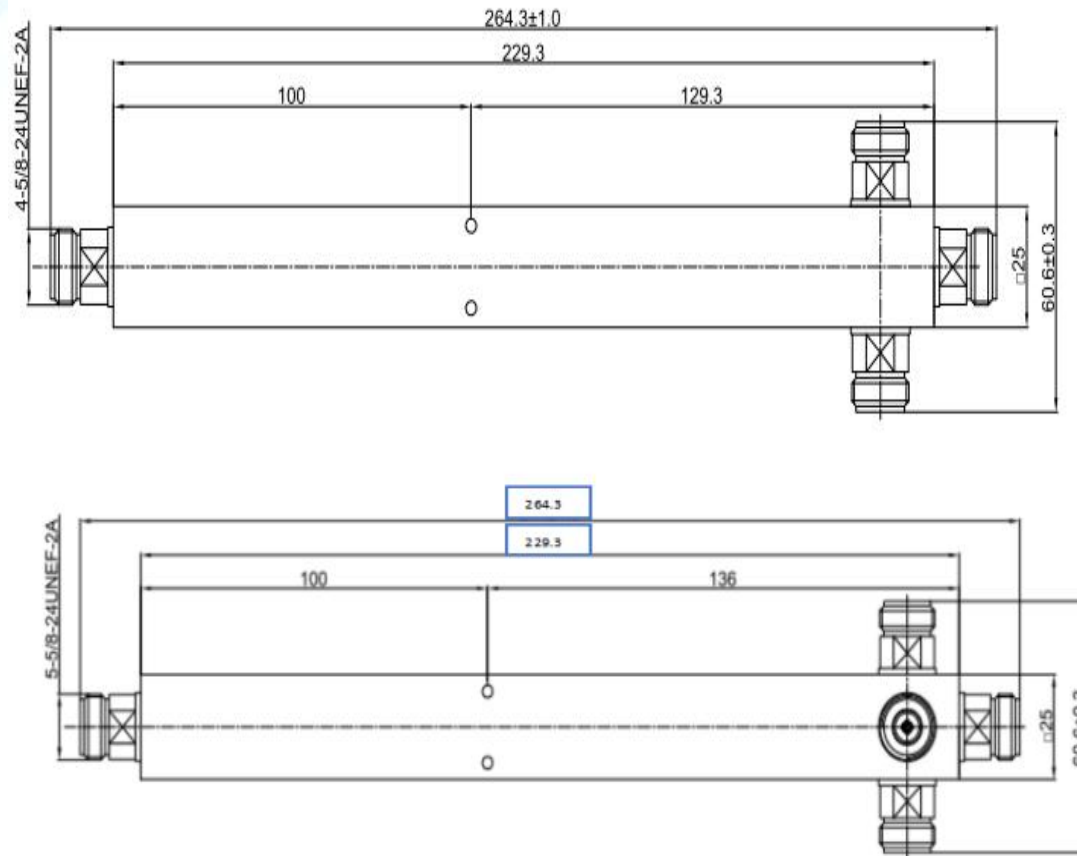

Tongyu Communication Inc.

No. 1, Dongzhendong 2nd RD, Torch Hi-Tech Development Zone, Zhongshan, Guangdong, China
Tel: +86 (0)760 85318111 Fax: +86 (0)760 85594662 Website: www.tycc.cn email: sales@tycc.cn